



CE-EMC Test Report

Equipment under Test : Anemometer

Trade Name: : LODESTAR

Model /Type : LD363

Listed Models : LD353

Applicant : **Shenzhen LODESTAR Precision Tool Co., Ltd**

Address : 2nd Floor, Building 10, Longbi Industrial Zone, Bantian Street, Longgang District, Shenzhen City, Guangdong Province

Manufacturer : **Shenzhen LODESTAR Precision Tool Co., Ltd**

Address : 2nd Floor, Building 10, Longbi Industrial Zone, Bantian Street, Longgang District, Shenzhen City, Guangdong Province

Laboratory : Guangdong Lintek Certification Group Co., Ltd.

Address : Room 318, No.116-2, Guanlan Road, Fucheng Street, Longhua District, Shenzhen, China

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Test Result:	PASS
---------------------	-------------





TEST RESULT CERTIFICATION

Applicant's name : **Shenzhen LODESTAR Precision Tool Co., Ltd**
Address : 2nd Floor, Building 10, Longbi Industrial Zone, Bantian Street,
Longgang District, Shenzhen City, Guangdong Province
Manufacturer's Name : **Shenzhen LODESTAR Precision Tool Co., Ltd**
Address : 2nd Floor, Building 10, Longbi Industrial Zone, Bantian Street,
Longgang District, Shenzhen City, Guangdong Province
Product description
Product name : Anemometer
Model No. : LD363, LD353
Standards : EN 55032:2015+A11:2020+A1:2020
EN 55035:2017+A11:2020
EN IEC 61000-3-2:2019+A1:2021+A2:2024
EN 61000-3-3:2013+A1:2019+A2:2021

This device described above has been tested by Lintek-lab's, and the test results show that the equipment under test (EUT) is in compliance with the 2014/30/EU requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Lintek-lab's, this document may be altered or revised by Lintek-lab's, personal only, and shall be noted in the revision of the document.

Date of Test :
Date (s) of performance of tests : December 17-24, 2024
Date of Issue : December 25, 2024
Test Result : **Pass**

Test by (name and signature):

Peter Zhu

Project Engineer

.....



Approved by (name and signature):

Maarten Hou

Assistant Manager

.....





Table of Contents	Page
1. TEST SUMMARY	6
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
2. GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	10
2.3 DESCRIPTION OF TEST SETUP	11
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	11
2.5 MEASUREMENT INSTRUMENTS LIST	12
3. EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.1.1 POWER LINE CONDUCTED EMISSION	15
3.1.2 TEST PROCEDURE	16
3.1.3 TEST SETUP	16
3.1.4 EUT OPERATING CONDITIONS	16
3.1.5 TEST RESULTS	17
3.2 RADIATED EMISSION MEASUREMENT	18
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	18
3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT	18
3.2.3 TEST PROCEDURE	18
3.2.4 TEST SETUP	19
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS	20
3.2.7 TEST RESULTS (1000~6000MHz)	22
3.3 HARMONICS CURRENT	23
3.3.1 LIMITS OF HARMONICS CURRENT	23
3.3.2 TEST PROCEDURE	24
3.3.3 EUT OPERATING CONDITIONS	24
3.3.4 TEST SETUP	24
3.3.5 TEST RESULTS	25
3.4 VOLTAGE FLUCTUATION AND FLICKERS	26
3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS	26
3.4.2 EUT OPERATING CONDITIONS	26
3.4.3 TEST SETUP	27
3.4.4 TEST RESULTS	28





Table of Contents	Page
4. EMC IMMUNITY TEST	29
4.1 STANDARD COMPLIANCE/SERVIRITY LEVEL/CRITERIA	29
4.2 GENERAL PERFORMANCE CRITERIA	30
4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP	30
4.4 ESD TESTING	31
4.4.1 TEST SPECIFICATION	31
4.4.2 TEST PROCEDURE	31
4.4.3 TEST SETUP	32
4.4.4 TEST RESULTS	33
4.5 RS TESTING	34
4.5.1 TEST SPECIFICATION	34
4.5.2 TEST PROCEDURE	34
4.5.3 TEST SETUP	35
4.5.4 TEST RESULTS	36
4.6 EFT/BURST TESTING	37
4.6.1 TEST SPECIFICATION	37
4.6.2 TEST PROCEDURE	37
4.6.3 TEST SETUP	38
4.6.4 TEST RESULTS	39
4.7 SURGE TESTING	40
4.7.1 TEST SPECIFICATION	40
4.7.2 TEST PROCEDURE	40
4.7.3 TEST SETUP	41
4.7.4 TEST RESULTS	42
4.8 INJECTION CURRENT TESTING	43
4.8.1 TEST SPECIFICATION	43
4.8.2 TEST PROCEDURE	43
4.8.3 TEST SETUP	43
4.8.4 TEST RESULTS	44
4.9 POWER FREQUENCY MAGNETIC FIELD TESTING	45
4.9.1 TEST SPECIFICATION	45
4.9.2 TEST PROCEDURE	45
4.9.3 TEST SETUP	45
4.9.4 TEST RESULTS	46
4.10 VOLTAGE INTERRUPTION/DIPS TESTING	47
4.10.1 TEST SPECIFICATION	47
4.10.2 TEST PROCEDURE	47





Table of Contents	Page
4.10.3 TEST SETUP	47
4.10.4 TEST RESULTS	48





1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
EN 55032:2015+A11:2020+A1:2 020	Conducted Emission charge AC And Telecom Port 150kHz to 30MHz	Class B	N/A	
	Radiated Emission 30MHz to 1000MHz	Class B	PASS	
	Radiated Emission 1GHz to 6GHz	Class B	N/A	NOTE (1)
EN IEC 61000-3-2:2019+A1:2021+A 2:2024	Harmonic Current Emission	Class A or D NOTE (2)	N/A	
EN 61000-3-3:2013+A1:2019+A 2:2021	Voltage Fluctuations & Flicker	-----	N/A	
EMC Immunity				
Section EN 55035-2017	Test Item	Performance Criteria	Judgment	Remark
EN 61000-4-2:2009	Electrostatic Discharge	B	PASS	
EN 61000-4-3:2020	RF electromagnetic field	A	PASS	
EN 61000-4-4:2012	Fast transients	B	N/A	
EN 61000-4-5:2006	Surges	B	N/A	
EN 61000-4-6:2012	Injected Current	A	N/A	
EN 61000-4-8:2010	Power Frequency Magnetic Field	A	N/A	
EN 61000-4-11:2004	Volt. Interruptions Volt. Dips	B / C / C NOTE (3)	N/A	

NOTE:

(1) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

(2) The power consumption of EUT is less than 75W and no Limits apply.

(3) Voltage dip: 100% reduction – Performance Criteria **B**

Voltage dip: 30% reduction – Performance Criteria **C**

Voltage Interruption: 100% Interruption – Performance Criteria **C**





- (4) For client's request and manual description, the test will not be executed.
- (5) "N/A" denotes test is not applicable in this Test Report





1.1 TEST FACILITY

Guangdong Lintek Certification Group Co., Ltd.

Add. : 302, Building B, Xunli Science and Technology Park, No.36 Zhangge Road, Fucheng Street, Longhua District, Shenzhen, Guangdong Province, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

Test Item	Uncertainty
Conducted Emission	2.6dB
Radiated Emission(Below 1G)	4.56dB(distance:3m; Polarize:V)
	4.42dB(distance:3m; Polarize:H)
Radiated Emission(1GHz-18GHz)	3.78dB(distance:3m; Polarize:V)
	3.69dB(distance:3m; Polarize:H)
Flicker test	1.7%
Harmonic test	1.88dB
R/S Test	0.92dB
C/S Test	0.68 dB
Test Site Temperature And Humidity	0.6℃
	3%





2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Anemometer
Model Name	LD363
Additional Model Number(s)	LD353
Model Difference	These models have the same circuit diagram, construction, only model name and appearance are different.
Power Rating	DC4.5V (1.5*3 AAA battery powered)
adapter	N/A
battery	N/A

NOTE:

1. For the test results, the EUT had been tested with all conditions. But only the worst case was showed in test report.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.





2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Battery
Mode 2	/
Mode 3	/
Mode 4	/

For Conducted Test	
Final Test Mode	Description
Mode 1	Battery
Mode 2	/
Mode 3	/
Mode 4	/

For Radiated Test	
Final Test Mode	Description
Mode 1	Battery
Mode 2	/
Mode 3	/
Mode 4	/


For EMS Test	
Final Test Mode	Description
Mode 1	Battery
Mode 2	/
Mode 3	/
Mode 4	/





2.3 DESCRIPTION OF TEST SETUP

Mode 1:



2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	EUT	N/A	LD363	N/A	EUT
E-2	Battery	N/A	AAA UM4 R03P	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.





2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED EMISSION

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	R&S	ENV216	101334	Apr. 2,24	Apr. 1,25	1 year
2	LISN	SCHWARZBECK	NNLK 8129	8129267	Apr. 2,24	Apr. 1,25	1 year
3	Pulse Limiter	SCHWARZBECK	VTSD 9561F	9716	Apr. 2,24	Apr. 1,25	1 year
4	50Ω Switch	ANRITSU CORP	MP59B	6200983704	Apr. 2,24	Apr. 1,25	1 year
5	Test Cable	N/A	C01	N/A	Apr. 2,24	Apr. 1,25	1 year
6	Test Cable	N/A	C02	N/A	Apr. 2,24	Apr. 1,25	1 year
7	Test Cable	N/A	C03	N/A	Apr. 2,24	Apr. 1,25	1 year
8	EMI Test Receiver	R&S	ESCI	101318	Apr. 2,24	Apr. 1,25	1 year
9	Passive Voltage Probe	ESH2-Z3	R&S	100173	Apr. 2,24	Apr. 1,25	1 year
10	Triple-Loop Antenna Factor	EVERFINE	LIA-2	11020016	Apr. 2,24	Apr. 1,25	1 year
11	Absorbing Clamp	R&S	MDS-21	100423	Apr. 2,24	Apr. 1,25	1 year

2.5.2 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Bilog Antenna Factor r	TESEQ	CBL6111D	31437	Apr. 2,24	Apr. 1,25	1 year
2	Test Cable	N/A	R-01	N/A	Apr. 2,24	Apr. 1,25	1 year
3	Test Cable	N/A	R-02	N/A	Apr. 2,24	Apr. 1,25	1 year
4	EMI Test Receiver	Rohde&Schwarz	ESVD	847312/008	Apr. 2,24	Apr. 1,25	1 year
5	Absolute value multturn encoder Mast	EM	SC100_1	N/A	N/A	N/A	N/A
6	Turn Table	EM	SC100	060533	N/A	N/A	N/A
7	50Ω Switch	Anritsu Corp	MP59B	6200983705	Apr. 2,24	Apr. 1,25	1 year
8	Spectrum Analyzer	Aglient	E4407B	160400005	Apr. 2,24	Apr. 1,25	1 year
9	Horn Antenna	EM	EM-AH-10180	2011071402	Apr. 2,24	Apr. 1,25	1 year





	Factor						
10	Amplifier	EM	EM-30180	060536	Apr. 2,24	Apr. 1,25	1 year

2.5.3 HARMONICS AND FILCK

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Harmonic & Flicker	EM TEST	DPA500	0303-08	Apr. 2,24	Apr. 1,25	1 year
2	AC Power Source	EM TEST	ACS500	0203-06	Apr. 2,24	Apr. 1,25	1 year

2.5.4 ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	ESD TEST GENERATOR	SCHAFFNER	NSG438	858	Apr. 2,24	Apr. 1,25	1 year

2.5.5 RS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Signal Generator	R&S	SMT 06	832080/007	Apr. 2,24	Apr. 1,25	1 year
2	Log-Bicon Antenna Factor r	Schwarzbeck	VULB9161	4022	Apr. 2,24	Apr. 1,25	1 year
3	Power Amplifier	AR	150W1000M1	320946	Apr. 2,24	Apr. 1,25	1 year
4	Microwave Horn Antenna Factor r	AR	AT4002A	321467	Apr. 2,24	Apr. 1,25	1 year
5	Power Amplifier	AR	25S1G4A	308598	Apr. 2,24	Apr. 1,25	1 year

2.5.6 SURGE, EFT/BURST, VOLTAGE INTERRUPTION/DIPS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Surge Generator	EVERFINE	EMS61000-5A	1101002	Apr. 2,24	Apr. 1,25	1 year
2	DIPS Generator	EVERFINE	EMS61000-11K	1011002	Apr. 2,24	Apr. 1,25	1 year
3	EFT/B Generator	EVERFINE	EMS61000-4A-V2	1012005	Apr. 2,24	Apr. 1,25	1 year





2.5.7 INJECTION CURRENT

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Signal Generator	IFR	2023A	202301/368	Apr. 2,24	Apr. 1,25	1 year
2	Power Amplifier	AR	75A250AM1	0320709	Apr. 2,24	Apr. 1,25	1 year
3	CDN	FCC	FCC-801-M2	06043	Apr. 2,24	Apr. 1,25	1 year
4	EM Clamp	FCC	F-203I-23MM	504	Apr. 2,24	Apr. 1,25	1 year

2.4.8 MF

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Generator	EVERFINE	EMS61000-8K	1007001	Apr. 2,24	Apr. 1,25	1 year





3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

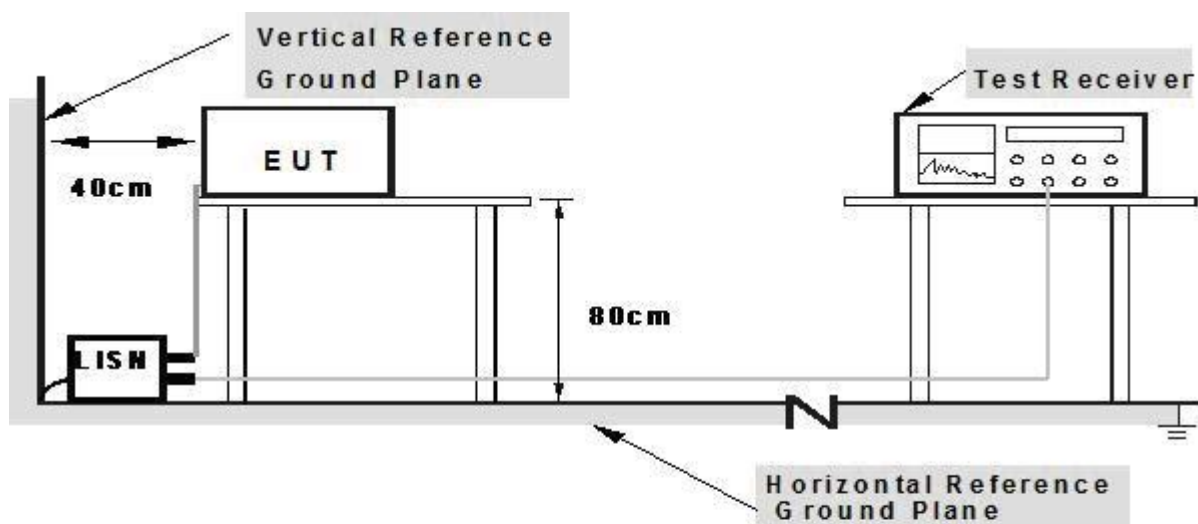

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

*****N/A*****





3.1.5 TEST RESULTS

EUT :	N/A	Model Name. :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	N/A
Test Mode :	N/A	Phase :	N/A
Test Voltage :	N/A		





3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	Class A		Class B	
	At 10m	At 3m	At 10m	At 3m
	dBuV/m	dBuV/m	dBuV/m	dBuV/m
30 – 230	40	50	30	40
230 – 1000	47	57	37	47

3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (at 3m) dBuV/m		Class B (at 3m) dBuV/m	
	Peak	Avg	Peak	Avg
1000-3000	76	56	70	50
3000-6000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to as following:
CISPR 22.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).


3.2.3 TEST PROCEDURE

- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




3.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

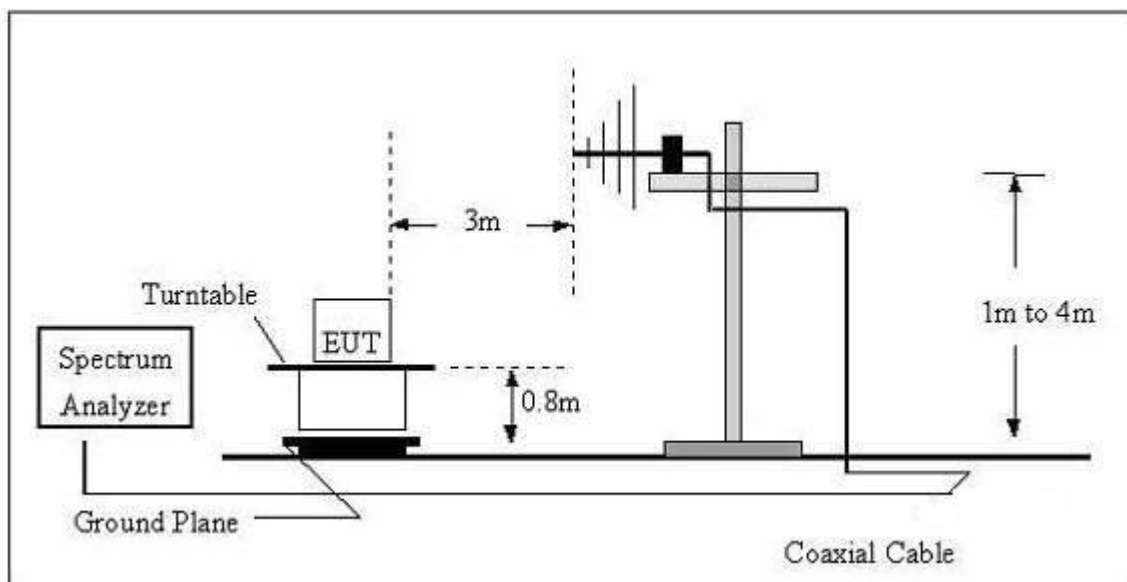

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

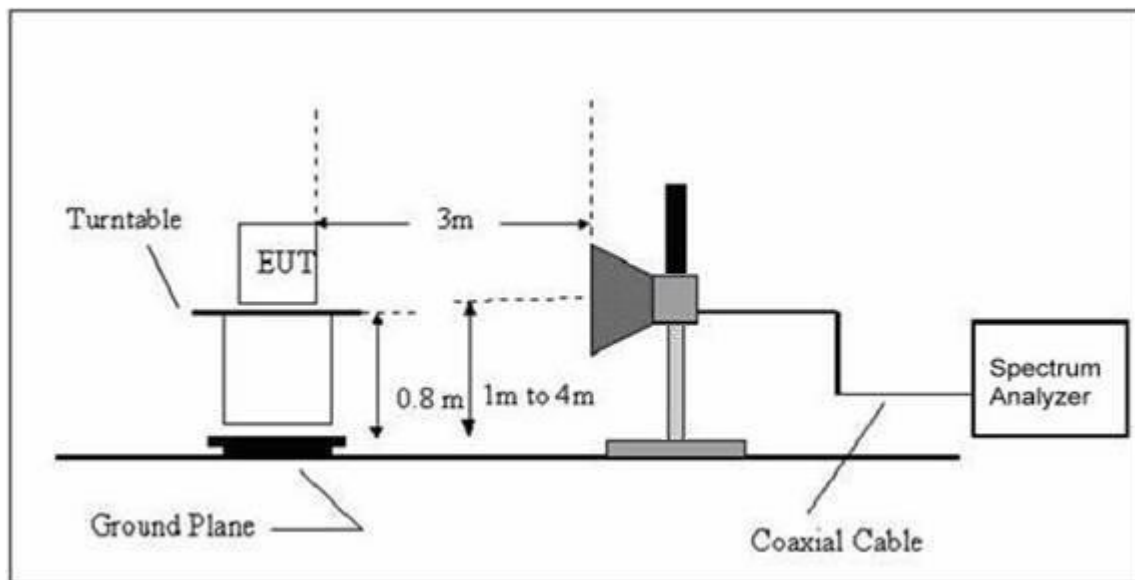

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.






3.2.6 TEST RESULTS

EUT :	Wrist watches	Model Name :	LD363
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2024-12-20
Test Mode :	Battery	Polarization :	Horizontal
Test Power :	DC4.5V		

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

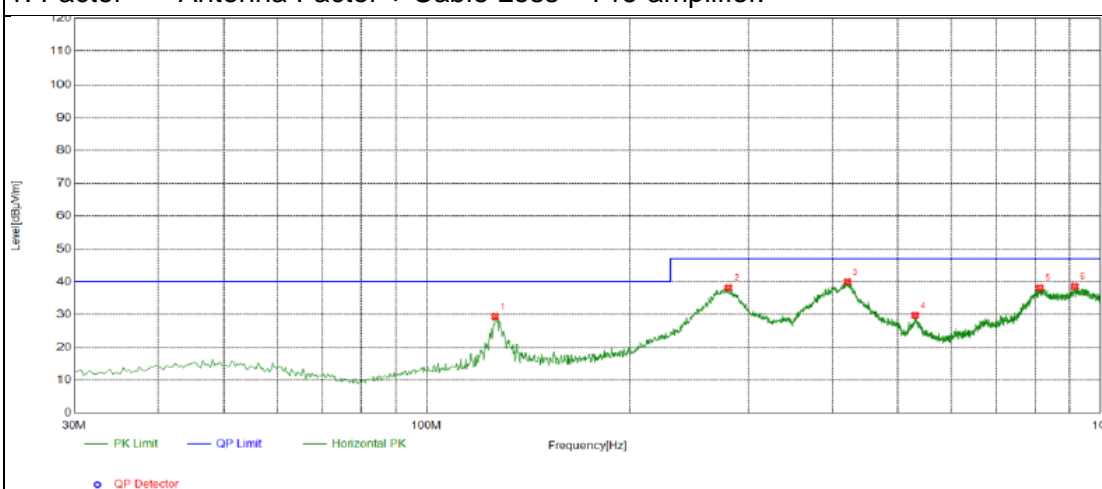

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	126.3855	-18.04	47.45	29.41	40.00	10.59	100	331	Horizontal
2	280.6669	-13.22	51.42	38.20	47.00	8.80	100	34	Horizontal
3	421.3638	-10.01	49.98	39.97	47.00	7.03	100	331	Horizontal
4	531.0103	-7.43	37.16	29.73	47.00	17.27	100	213	Horizontal
5	813.0510	-2.88	41.04	38.16	47.00	8.84	100	63	Horizontal
6	915.5819	-1.77	40.35	38.58	47.00	8.42	100	173	Horizontal






EUT :	Wrist watches	Model Name :	LD363
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2024-12-20
Test Mode :	Battery	Polarization :	Vertical
Test Power :	DC4.5V		

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

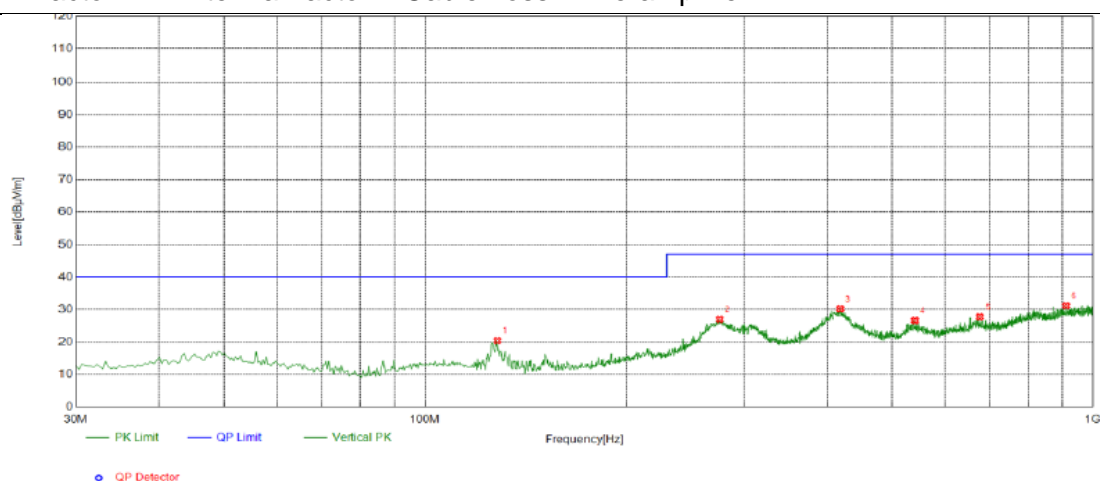

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	128.3261	-18.32	38.79	20.47	40.00	19.53	100	220	Vertical
2	276.1387	-13.41	40.43	27.02	47.00	19.98	100	315	Vertical
3	418.4528	-10.06	40.35	30.29	47.00	16.71	100	231	Vertical
4	541.6839	-7.16	33.83	26.67	47.00	20.33	100	47	Vertical
5	676.8823	-4.78	32.57	27.79	47.00	19.21	100	209	Vertical
6	911.3771	-1.75	32.94	31.19	47.00	15.81	100	179	Vertical





3.2.7 TEST RESULTS (1000~6000MHz)

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	NA
Test Mode :	N/A	Polarization :	NA
Test Power :	N/A		





3.3 HARMONICS CURRENT

3.3.1 LIMITS OF HARMONICS CURRENT

IEC 555-2					
Table - I			Table - II		
Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in Amperes)	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in Amperes)
Non Portable Tools or TV Receivers	Odd Harmonics		TV Receivers	Odd Harmonics	
	3	2.30		3	0.80
	5	1.14		5	0.60
	7	0.77		7	0.45
	9	0.40		9	0.30
	11	0.33		11	0.17
	13	0.21		13	0.12
	15≤n≤39	0.15 · 15/n		15≤n≤39	0.10 · 15/n
	Even Harmonics			Even Harmonics	
	2	1.08		2	0.30
	4	0.43		4	0.15
	8	0.30			
	8≤n≤40	0.23 · 8/n		DC	0.05

EN 61000-3-2/IEC 61000-3-2					
Equipment Category	Max. Permissible Harmonic Current (in Amperes)	Equipment Category	Harmonic Order n	Max. Permissible Harmonic Current (in A) (mA/w)	
Class A	Same as Limits Specified in 4-2.1, Table - I, but only odd harmonics required	Class D	3	2.30	3.4
			5	1.14	1.9
			7	0.77	1.0
			9	0.40	0.5
			11	0.33	0.35
			$13 \leq n \leq 39$	see Table I	$3.85/n$
			only odd harmonics required		



3.3.2 TEST PROCEDURE

a. The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions.

b. The classification of EUT is according to section 5 of EN 61000-3-2. The EUT is classified as follows:

Class A: Balanced three-phase equipment, Household appliances excluding equipment as Class D, Tools excluding portable tools, Dimmers for incandescent lamps, audio equipment, equipment not specified in one of the three other classes.

Class B: Portable tools. Portable tools.; Arc welding equipment which is not professional equipment.

Class C: Lighting equipment.


Class D: Equipment having a specified power less than or equal to 600W of the following types: Personal computers and personal computer monitors and television receivers.

c. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

3.3.3 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.4 TEST SETUP

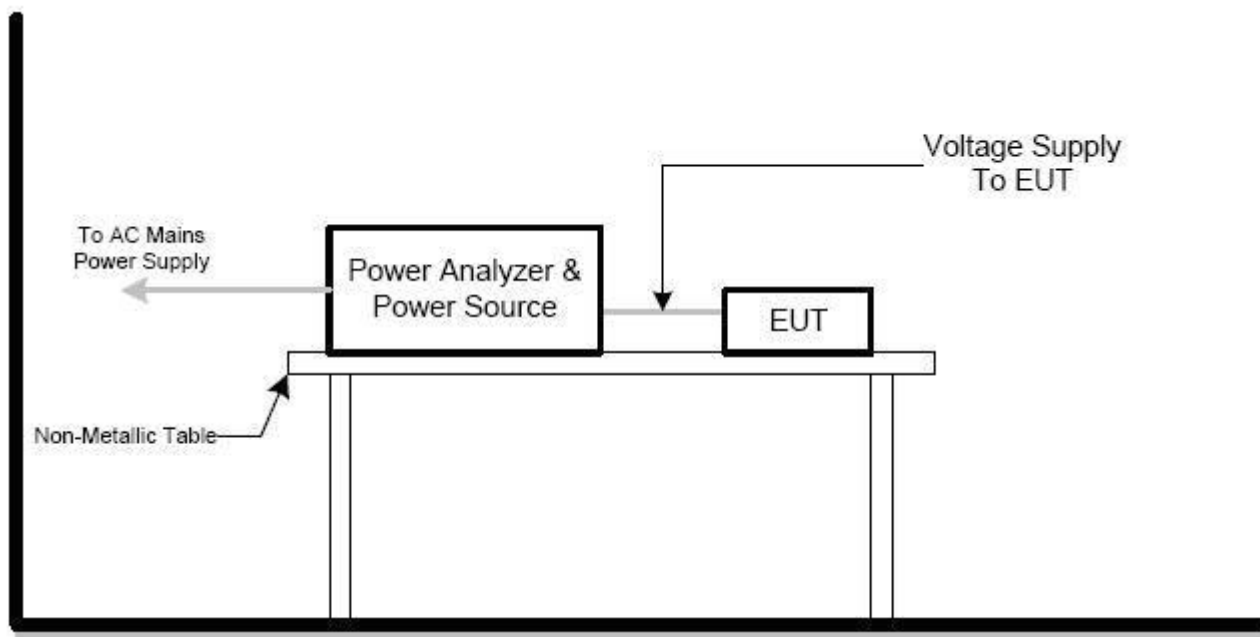



3.3.5 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	N/A
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****





3.4 VOLTAGE FLUCTUATION AND FLICKERS

3.4.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKERS

Tests	Limits		Descriptions
	IEC555-3	IEC/EN 61000-3-3	
Pst	≤ 1.0 , $T_p = 10$ min.	≤ 1.0 , $T_p = 10$ min.	Short Term Flicker Indicator
Plt	N/A	≤ 0.65 , $T_p = 2$ hr.	Long Term Flicker Indicator
dc	$\leq 3\%$	$\leq 3.3\%$	Relative Steady-State V-Chang
dmax	$\leq 4\%$	$\leq 4\%$	Maximum Relative V-change
d (t)	N/A	$\leq 3.3\%$ for > 500 ms	Relative V-change characteristic

1 TEST PROCEDURE

a. Harmonic Current Test:

Test was performed according to the procedures specified in Clause 5.0 of IEC555-2 and/or Sub-clause 6.2 of IEC/EN 61000-3-2 depend on which standard adopted for compliance measurement.

b. Fluctuation and Flickers Test:

Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 5.0/6.0 of IEC555-3 and/or Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.


c. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.

3.4.2 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.4.3 TEST SETUP

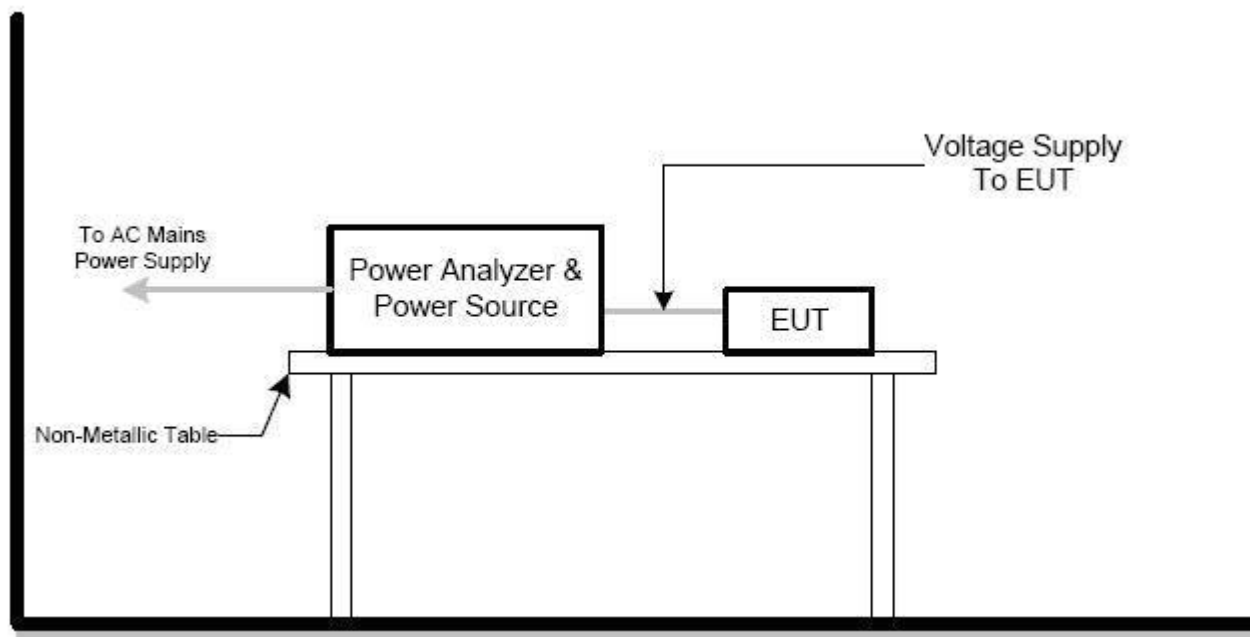



3.4.4 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	NA
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****





4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/SERVRITY LEVEL/CRITERIA

Tests Standard No.	TEST SPECIFICATION	Test Mode Test Ports	Perform. Criteria
1. ESD IEC/EN 61000-4-2	8KV air discharge 4KV contact discharge	Direct Mode	B
	4KV HCP discharge 4KV VCP discharge	Indirect Mode	B
2. RS IEC/EN 61000-4-3	80 MHz to 1000 MHz, 1000Hz, 80%, AM modulated	Enclosure	A
3. EFT/Burst IEC/EN 61000-4-4	5/50ns Tr/Th 5KHz Repetition Freq.	Power Supply Port	B
	5/50ns Tr/Th 5KHz Repetition Freq.	CTL/Signal Data Line Port	B
4. Surges IEC/EN 61000-4-5	1.2/50(8/20) Tr/Th us	L-N	B
	1.2/50(8/20) Tr/Th us	L-PE N-PE	B
5 Injected Current IEC/EN 61000-4-6	0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance	CTL/Signal Port	A
	0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance	AC Power Port	A
	0.15 MHz to 80 MHz, 1000Hz 80 % , AM Modulated 150Ω source impedance	DC Power Port	A
6. Power Frequency Magnetic Field IEC/EN 61000-4-8	50 Hz,	Enclosure	A
7. Volt. Interruptions Volt. Dips IEC/EN 61000-4-11	Voltage dip 100%	AC Power Port	B
	Voltage dip 30%		C
	Interruption 100%		C





4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55035** standard, the general performance criteria as following:

Criterion A	<p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p>
Criterion B	<p>After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p>
Criterion C	<p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>

4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.





4.4 ESD TESTING

4.4.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330 ohm / 150 pF
Required Performance	B
Discharge Voltage:	Air Discharge : 2kV/4kV/8kV (Direct) Contact Discharge : 2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 200 times in total 50 times at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

4.4.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT.
During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. chargee of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.
If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.
Vertical Coupling Plane (VCP):
The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
Horizontal Coupling Plane (HCP):
The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
- b. Air discharges at insulation surfaces of the EUT.
It was at least ten single discharges with positive and negative at the same selected point.





4.4.4 TEST RESULTS

EUT :	Wrist watches	Model Name :	LD363
Temperature :	25 °C	Relative Humidity :	45%
Pressure :	1010 hPa	Test Date :	2024-12-20
Test Mode :	Battery		
Test Power :	DC4.5V		

Mode	Contact Discharge (Indirect)							Criterion	Result
Test level (kV)	Test Point	2		4		6			
Test Location		+	-	+	-	+	-		
HCP	Front	A	A	A	A			B	PASS
	Rear	A	A	A	A				PASS
	Left	A	A	A	A				PASS
	Right	A	A	A	A				PASS
VCP	Front	A	A	A	A				PASS
	Rear	A	A	A	A				PASS
	Left	A	A	A	A				PASS
	Right	A	A	A	A				PASS

Mode	Air Discharge								Contact Discharge								Criterion	Result
Test level (kV)	2		4		8		15		2		4		6		8			
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
shell									A	A	A	A					B	PASS
Battery									A	A	A	A					B	PASS
screen	A	A	A	A	A	A											B	PASS
Key	A	A	A	A	A	A											B	PASS

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)





4.5 RS TESTING

4.5.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-3
Required Performance	A
Frequency Range:	80 MHz - 1000 MHz
Field Strength:	3 V/m
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Polarity of Isolated DC-DC Converter:	Horizontal and Vertical
Test Distance:	3 m
Isolated DC-DC Converter Height:	1.5 m
Dwell Time:	at least 3 seconds

4.5.2 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.


The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:

- The frequency range is swept from 80 MHz to 1000 MHz, & 1400MHz - 2700MHz with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5x 10-3 decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- Sweep Frequency 900 MHz, with the Duty Cycle:1/8 and Modulation: Pulse 217 Hz(if applicable)
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.



4.5.3 TEST SETUP

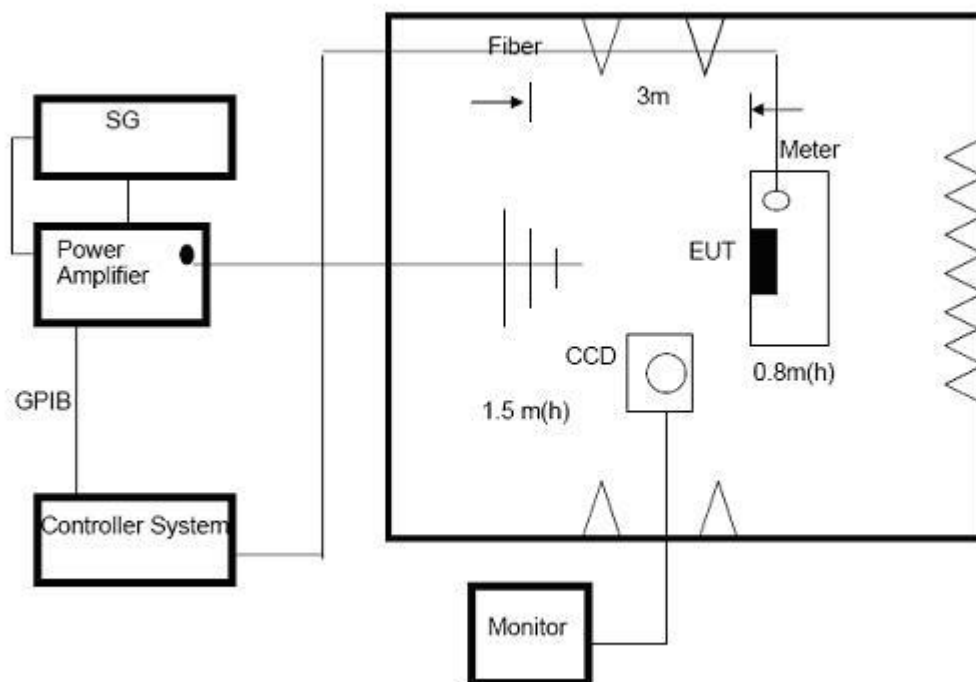

Note:

TABLE-TOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.





4.5.4 TEST RESULTS

EUT :	Wrist watches	Model Name :	LD363
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1010 hPa	Test Date :	2024-12-20
Test Mode :	Battery		
Test Power :	DC4.5V		

Frequency Range (MHz)	RF Field Position	R.F. Field Strength	Azimuth	Perform. Criteria	Results	Judgment
80MHz - 1000MHz	H / V	3 V/m (rms) AM Modulated 1000Hz, 80%	Front	A	A	PASS
			Rear			
			Left			
			Right			

Note:

- 1) N/A - denotes test is not applicable in this test report.
- 2) Criteria A: There was no change operated with initial operating during the test.
- 3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 4) Criteria C: The system shut down during the test.





4.6 EFT/BURST TESTING

4.6.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-4
Required Performance	B
Test Voltage:	Power Line : 1 kV Signal/Control Line : 0.5 KV
Polarity:	Positive & Negative
Impulse Frequency:	5 kHz
Impulse Wave shape :	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	Not less than 1 min.



4.6.2 TEST PROCEDURE

The EUT and its simulators were placed on a ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness. The other condition as following manner:

- The length of power cord between the coupling device and the EUT should not exceed 0.5 meter.
- Both positive and negative polarity discharges were applied.
- The duration time of each test sequential was 1 minute



4.6.3 TEST SETUP

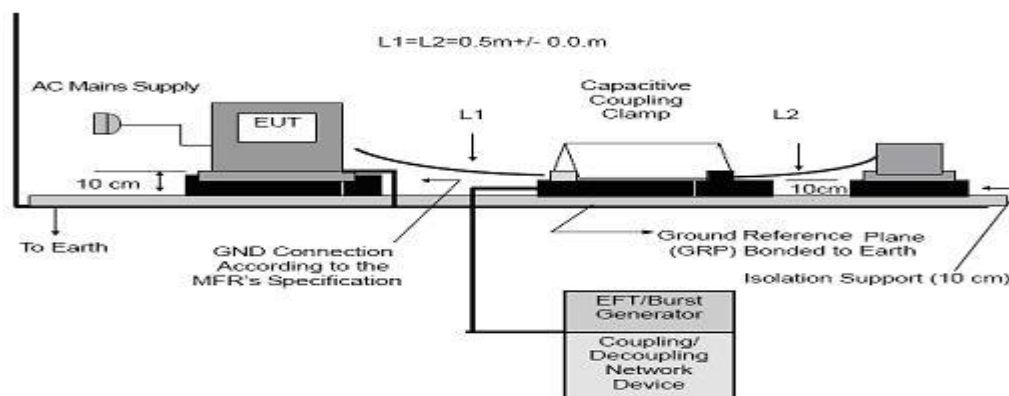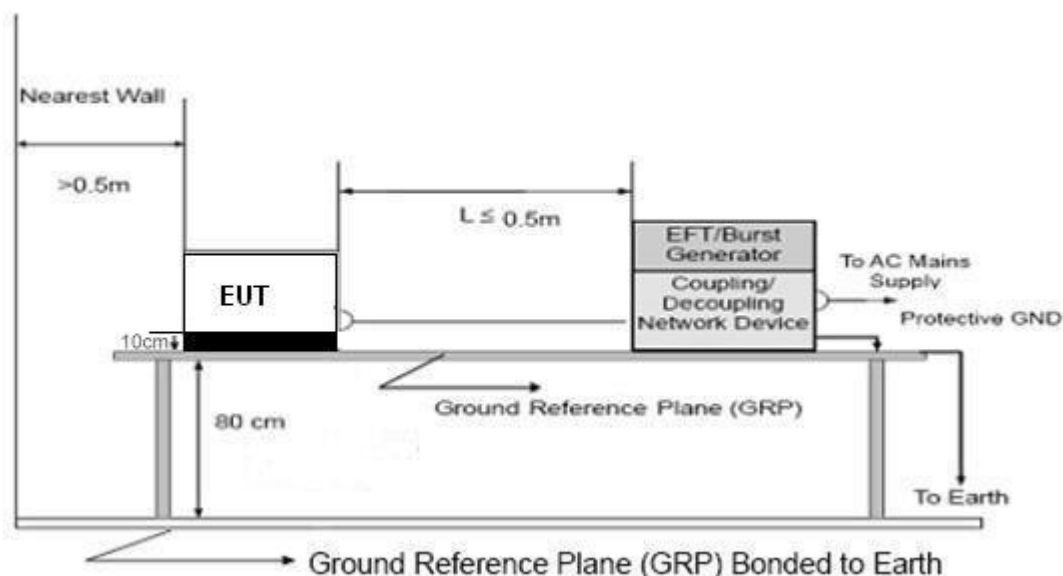

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.





4.6.4 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	NA
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****





4.7 SURGE TESTING

4.7.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-5
Required Performance	B
Wave-Shape:	Combination Wave 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current
Test Voltage:	Power Line : 0.5 kV, 1 kV, 2 kV
Surge Input/Output:	L-N
Generator Source:	2 ohm between networks
Impedance:	12 ohm between network and ground
Polarity:	Positive/Negative
Phase Angle:	0 /90/180/270°
Pulse Repetition Rate:	1 time / min. (maximum)
Number of Tests:	5 positive and 5 negative at selected points

4.7.2 TEST PROCEDURE

a. For EUT power supply:

The surge is to be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks shall be 2meters in length (or shorter).

b. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:

The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).


c. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT:

d. The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).





4.7.3 TEST SETUP

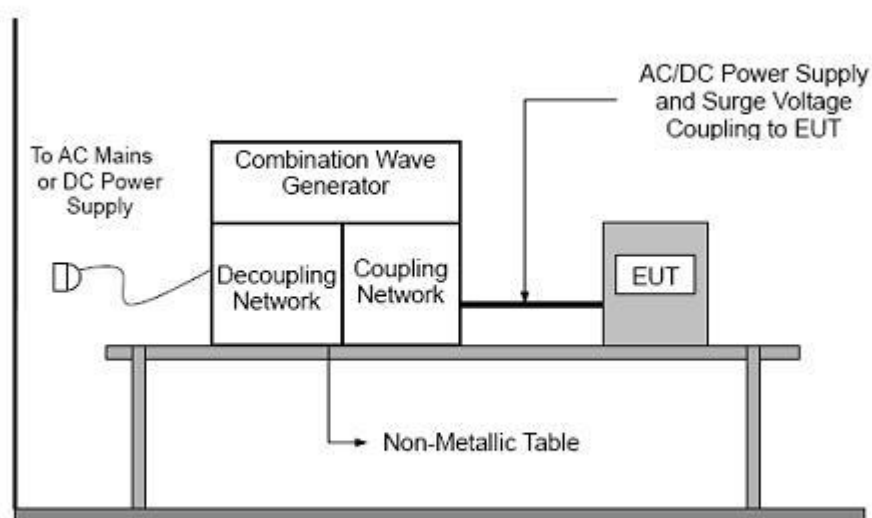



4.7.4 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	NA
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****



4.8 INJECTION CURRENT TESTING

4.8.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-6
Required Performance	A
Frequency Range:	0.15 MHz - 80 MHz
Field Strength:	3 Vr.m.s.
Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of fundamental
Dwell Time:	at least 3 seconds


4.8.2 TEST PROCEDURE

The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50mm (where possible). The disturbance signal described below is injected to EUT through CDN.

The other condition as following manner:

- The frequency range is swept from 150 KHz to 80 MHz, with the signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.

4.8.3 TEST SETUP

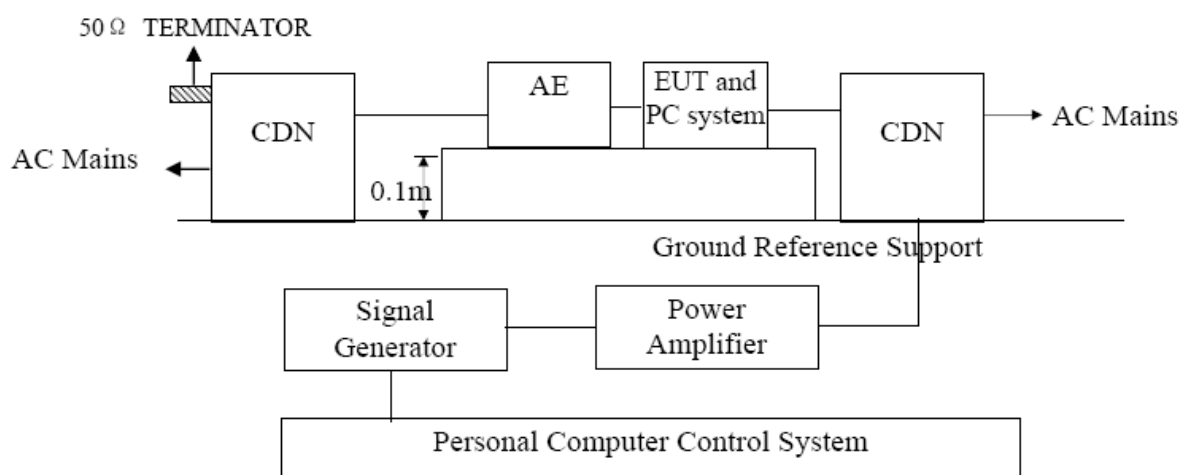

NOTE:

FLOOR-STANDING EQUIPMENT





The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

4.8.4 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	NA
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****



4.9 POWER FREQUENCY MAGNETIC FIELD TESTING

4.9.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-8
Required Performance	A
Frequency Range:	50Hz
Field Strength:	1 A/m
Observation Time:	1 minute
Inductance Coil:	Rectangular type, 1mx1m


4.9.2 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.

4.9.3 TEST SETUP

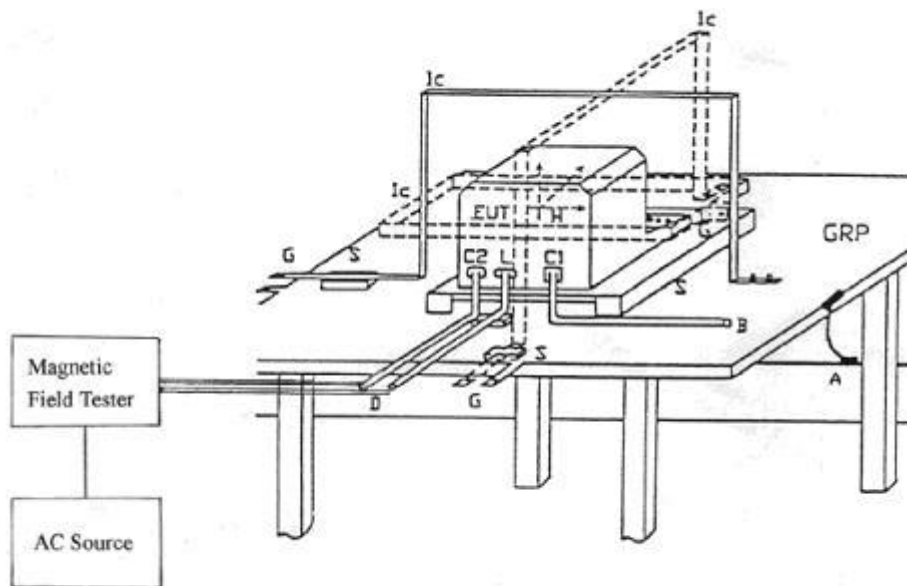

Note:

TABLE-TOP EQUIPMENT

The equipment shall be subjected to the test magnetic field by using the induction coil of standard dimension (1 m x 1 m). The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.





FLOOR-STANDING EQUIPMENT

The equipment shall be subjected to the test magnetic field by using induction coils of suitable dimensions. The test shall be repeated by moving and shifting the induction coils, in order to test the whole volume of the EUT for each orthogonal direction. The test shall be repeated with the coil shifted to different positions along the side of the EUT, in steps corresponding to 50 % of the shortest side of the coil. The induction coil shall then be rotated by 90 degrees in order to expose the EUT to the test field with different orientations.

4.9.4 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	N/A
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****





4.10 VOLTAGE INTERRUPTION/DIPS TESTING


4.10.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-11
Required Performance	B (For 100% Voltage Dips) C (For 30% Voltage Dips) C (For 100% Voltage Interruptions)
Test Duration Time:	Minimum three test events in sequence
Interval between Event:	Minimum ten seconds
Phase Angle:	0°/45°/90°/135°/180°/225°/270°/315°/360°
Test Cycle:	3 times

4.10.2 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.10.3 TEST SETUP

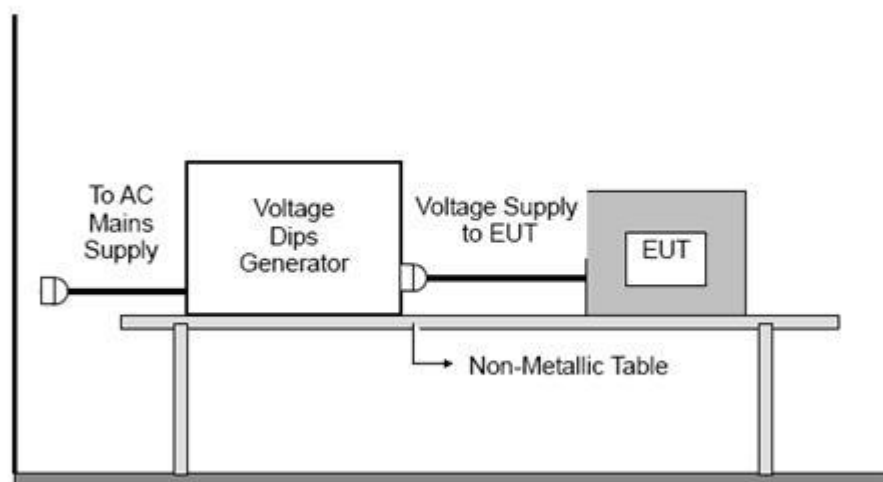



4.10.4 TEST RESULTS

EUT :	N/A	Model Name :	N/A
Temperature :	N/A	Relative Humidity :	N/A
Pressure :	N/A	Test Date :	N/A
Test Mode :	N/A		
Test Power :	N/A		

*****N/A*****



ATTACHMENT PHOTOGRAPHS OF EUT



Photo 1



Photo 2





Photo 3



Photo 4





Photo 5



Photo 6





Photo 7

--The end of report--

